






AIR

 : -10° ÷ +50°C

Mod	Cod		P _{MAX}		
AIR ZINC. 750/16	A4K2R59	750	16	750	2060
AIR ZINC. 1000/12	A4K2N62	1000	12	800	2355
AIR ZINC. 1000/16	A4K2R62	1000	16	800	2355
AIR ZINC. 1500/8	A4K2J67	1500	8	950	2425
AIR ZINC. 1500/12	A4K2N67	1500	12	950	2425
AIR ZINC. 1500/16	A4K2R67	1500	16	950	2425
AIR ZINC. 2000/8	A4K2J70	2000	8	1100	2505
AIR ZINC. 2000/12	A4K2N70	2000	12	1100	2505
AIR ZINC. 2000/16	A4K2R70	2000	16	1100	2505
AIR ZINC. 2500/8	A4K2J72	2500	8	1250	2575
AIR ZINC. 2500/12	A4K2N72	2500	12	1250	2575
AIR ZINC. 3000/8	A4K2J74	3000	8	1250	2875
AIR ZINC. 3000/12	A4K2N74	3000	12	1250	2875
AIR ZINC. 4000/8	A4K2J77	4000	8	1400	3005
AIR ZINC. 4000/12	A4K2N77	4000	12	1400	3005
AIR ZINC. 5000/8	A4K2J80	5000	8	1550	3035
AIR ZINC. 5000/12	A4K2N80	5000	12	1550	3035
AIR ZINC. 7500/8	A4K2J87	7500	8	1650	4185
AIR ZINC. 7500/12	A4K2N87	7500	12	1650	4185
AIR ZINC. 10000/8	A4K2J92	10000	8	1650	5185
AIR ZINC. 10000/12	A4K2N92	10000	12	1650	5185

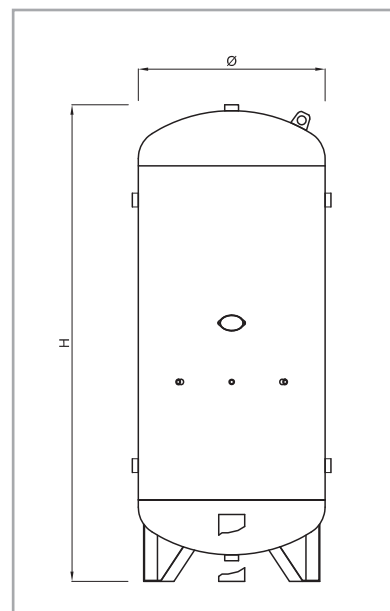

Galvanized tanks

Distributori di acqua fredda